

Operating pressure – 150 psi
Maximum operating temperature –
F

A A A A

Safety factor – 4:1
Minimum burst at 600 psi
Tested to 250,000 cycles without
leakage

High density
inlet in various sizes:
4 in.

A A

Residential/light commercial
softening
Residential/light commercial
filtration
Portable exchange tanks

GR – Gray NA – Natural
BL – Blue BK – Black

SPECIFICATIONS FOR PE LINER TANKS


Model	Dimensions		Opening		Volume (L)	Weight (kg)	Dimensions		Material
	Length (mm)	Width (mm)	Height (mm)	Depth (mm)			Length (mm)	Width (mm)	
7x17	7x17	180x430	2.5in.	N/A	431	185	2.3	8.6	Standard
	7x35	180x905	2.5in.	N/A	906	185	5.2	19.7	Standard
	7x44	180x1130	2.5in.	N/A	1128	185	6.7	25.4	Standard
8x17	8x17	205x445	2.5in.	N/A	432	210	3.0	11.4	Standard
	8x35	205x905	2.5in.	N/A	901	210	6.6	25.0	Standard
	8x44	205x1130	2.5in.	N/A	1133	210	8.7	32.9	Standard
9x35	9x35	230x905	2.5in.	N/A	904	233	8.3	31.4	Standard
	9x42	230x1085	2.5in.	N/A	1071	233	10.1	38.2	Standard
	9x48	230x1230	2.5in.	N/A	1247	233	11.8	44.7	Standard
10x35	10x35	255x905	2.5in.	N/A	908	258	10.2	38.6	Standard
	10x40	255x1020	2.5in.	N/A	1024	258	11.7	44.3	Standard
	10x44	255x1130	2.5in.	N/A	1139	258	13.1	49.6	Standard
	10x54	255x1390	2.5in.	N/A	1390	258	16.4	62.1	Standard
12x48	12x48	300x1235	2.5in.	N/A	1231	306	20.6	78.0	Standard
	12x52	300x1340	2.5in.	N/A	1328	306	22.2	84.0	Standard
13x54	13x54	330x1400	2.5in.	N/A	1366	333	27.0	102.2	Standard
14x65	14x65	355x1670	2.5in.	N/A	1656	370	38.0	143.8	Standard
	14x65	355x1670	4in.	N/A	1660	370	38.0	143.8	Standard
16x65	16x65	400x1670	2.5in.	N/A	1671	409	49.0	185.5	Standard
	16x65	400x1670	4in.	N/A	1677	409	49.0	185.5	Standard
18x65	18x65	450x1670	4in.	N/A	1693	472	64.0	242.3	SMC
21x62	21x62	535x1690	4in.	N/A	1705	557	82.4	312.0	SMC
	21x62	535x1690	4in.	4in.	1949	557	82.4	312.0	TRIPOD

* Measurements are subject to change without notice and are for reference only.


* Please refer the individual drawing for dimension, volumes and weight etc.




Detail 2.5 in. opening



Detail 4 in. opening



Detail base

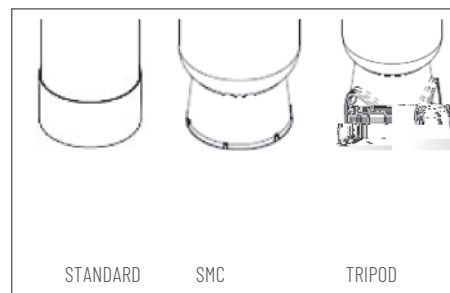

Pentair Water (SuZhu) Co., Ltd

Pentair Residential Filtration, LLC